


# ROUND METAL CEILING Loudspeaker

➤ **RCS3/T**

## INSTALLATION INSTRUCTIONS


### ➤ STEP 1

Cut an 85 mm diameter hole in the ceiling.

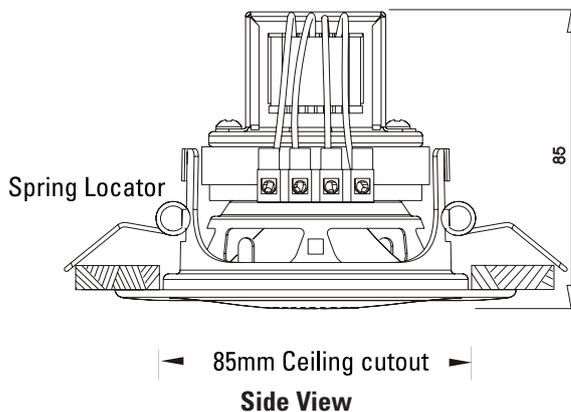


### ➤ STEP 2

Selecting the required power tap (watts) by connecting the field cable into the Terminal block as described in section 4.

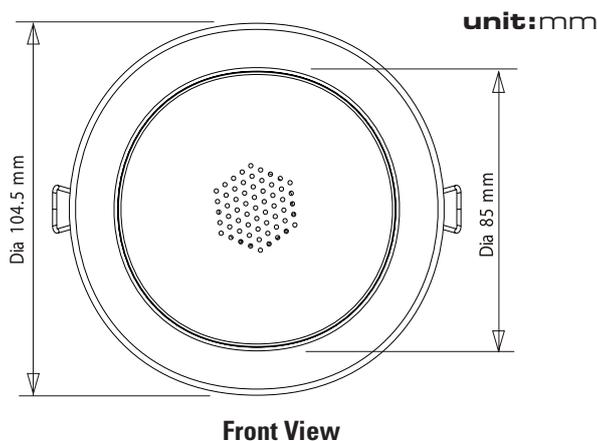


### ➤ STEP 3

Fit the speaker into the ceiling cutout by holding the mounting springs in an upwards position. Guide them through the cutout and release. The speaker will then locate automatically.

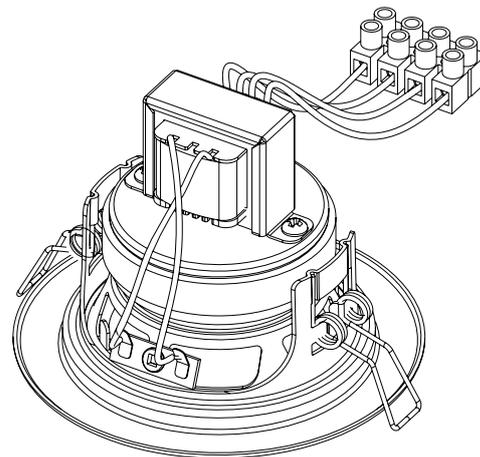

### ➤ STEP 4

You will find on the top of the ceiling loudspeaker a 100 volt line transformer complete with flying leads and terminal Block, this is were you connect your 100v line speaker cable. Connect the negative speaker cable to the black wire (common) to one of the other free terminals, selecting your chosen tapping as per the circuit diagram detailed below.

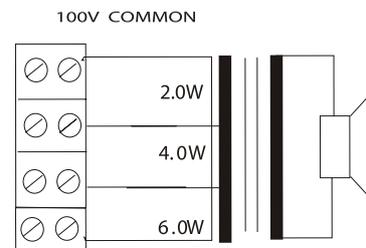

Circuit Diagram



**Penton UK Ltd**

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW

T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: SALES@PENTONUK.CO.UK

[www.pentonuk.co.uk](http://www.pentonuk.co.uk)

ISSUE MAY 2010